

A modern heritage post top luminaire upgraded with high performance light engines. Aesthetically designed sturdy construction ensures a long life against all weather condition. Product offered in symmetrical light distribution.

Product Description

- Luminaire body made of die-cast aluminium and non corrosive SS fasteners.
- Clear polycarbonate diffuser.
- Luminaire integrated with 30W LED.
- Suitable for mounting on 60mm OD pipe.
- Cable entries for through-wiring of mains supply cable
- Integral constant current power supply
- CRI (Ra) : ≥ 80
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-4511-CCT (Colour Temperature).
- Available CCT : 3000K, 4000K, 5700K



Product Benefits

- Elegant, Robust design
- Environmental friendly, moisture proof, insect free.
- Corrosion resistant and easy maintenance.
- Quick installation and low assembly costs.


Area of Application

Illuminating parks, Gardens, commercial complex, Pathways in residential buildings & office complex.

Available Finish

Pure polyester powder coated

- Graphite grey
- Anthracite grey
- Jet black

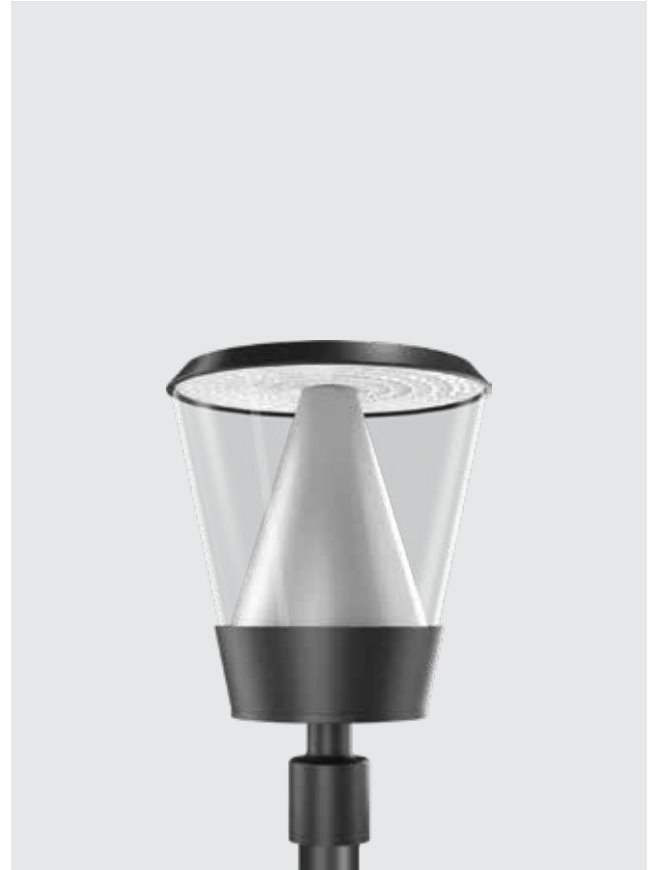



Technical Specifications

General

ID	: 4511
System Wattage	: 30W LED
Driver Integral	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+45°C

Physical

Body	: Die cast Aluminium
Diffuser	: Clear Polycarbonate
Mounting	: Suitable for Ø60mm OD Pipe
Finish	: Powder coated Jet black / Graphite grey Anthracite grey

Light Source

Light Source	: OSRAM
LED Lumens	: 4500 lm
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 6500K

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >85%

Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------

