


# K-LITE

## EVO DOT

Power : Upto 20W Upto 30W Upto 60W Upto 90W  
Length: 600mm 1200mm 2400mm 3600mm



### Features

- Nichia LED's
- CRI Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



### Options

- CCT : 3000K / 4000K / 5700K or TW 2700K to 5700K
- Driver options



L2: Vacuum Metalized Chrome Finish, UGR <12

Beam Angle



### Accessories




Canopy Kit for Dimmable options


PENDANT  
DIRECT



PENDANT  
DIRECT / INDIRECT



### Dimension in mm

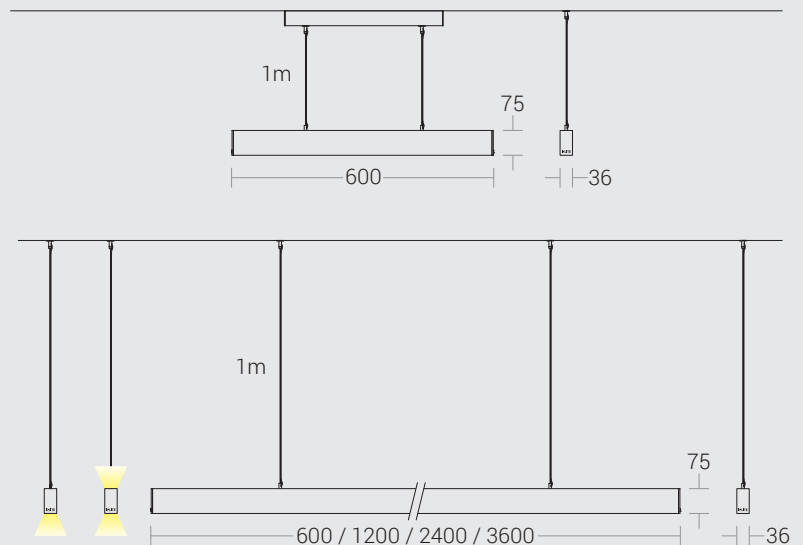

### Housing Colour



Extruded aluminium with powder coated finish in  
RAL9005 Black fine texture | RAL9016 White fine texture |  
RAL9006 Grey fine texture

Light Distribution refer online





## Technical Specifications

### General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: -15°C~+50°C

### Light Source

Light Source	: Nichia
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

### Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 12°, 20°, 34°, 48°, 60°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Vacuum Metalized Chrome Finish
UGR	: L2- <12

### Physical

Body	: Extruded Aluminium with Die-cast Endcaps
Mounting	: Surface / Pendant
Finish	: Black(RAL9005) White(RAL9016) Grey (RAL 9006)

### Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%



## Ordering Guide

### Pendant - Direct

ID	Wattage	Dimension (mm)
3470	Upto 20W	600 x 36 x 75
3471	Upto 30W	1200 x 36 x 75
3472	Upto 60W	2400 x 36 x 75
3473	Upto 90W	3600 x 36 x 75



### Pendant - Direct-Indirect

ID	Wattage	Dimension (mm)
3453	Upto 20W & 8W	600 x 36 x 75
3454	Upto 30W & 15W	1200 x 36 x 75
3455	Upto 60W & 30W	2400 x 36 x 75
3456	Upto 90W & 45W	3600 x 36 x 75

