






Open Source

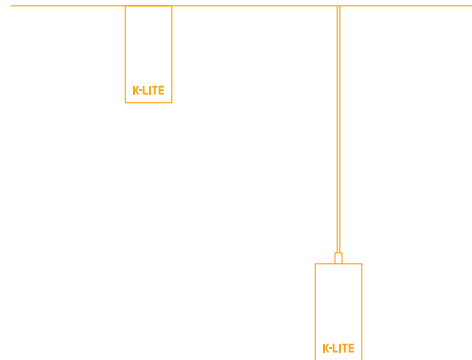

EVO

Stylish Design Multiple Applications

Evo convinces by its high efficiency and low glare optics whichl keeping a compact design. It can be mounted as a pendant or surface solution. Luminaire offering homogeneous illumination with wide or narrow light distributions.

K-LITE

EVO

Power : Upto 20W Upto 40W Upto 80W
 Length: 612mm 1212mm 2412mm



Features

- Nichia LED's
- CRI Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



Options

- CCT : 3000K / 4000K / 5700K or TW 2700K to 5700K
- Driver options



L2: Vaccum Metalized Chrome Finish, UGR <12

Beam Angle





Accessories



Canopy Kit for Dimmable options



Dimension in mm

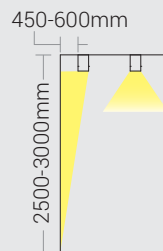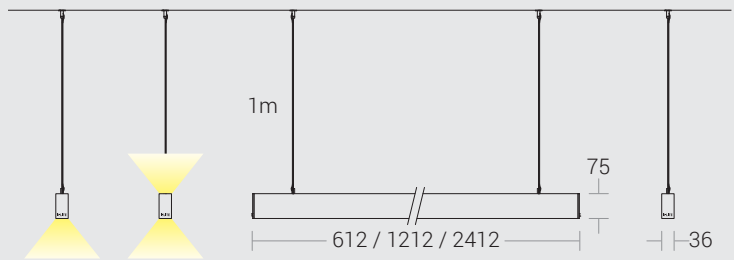

Housing Colour



Extruded aluminium with powder coated finish in
 RAL9005 Black fine texture | RAL9016 White fine texture |
 RAL9006 Grey fine texture


Light Distribution refer online



L2 - Direct



L2 - Wall Wash

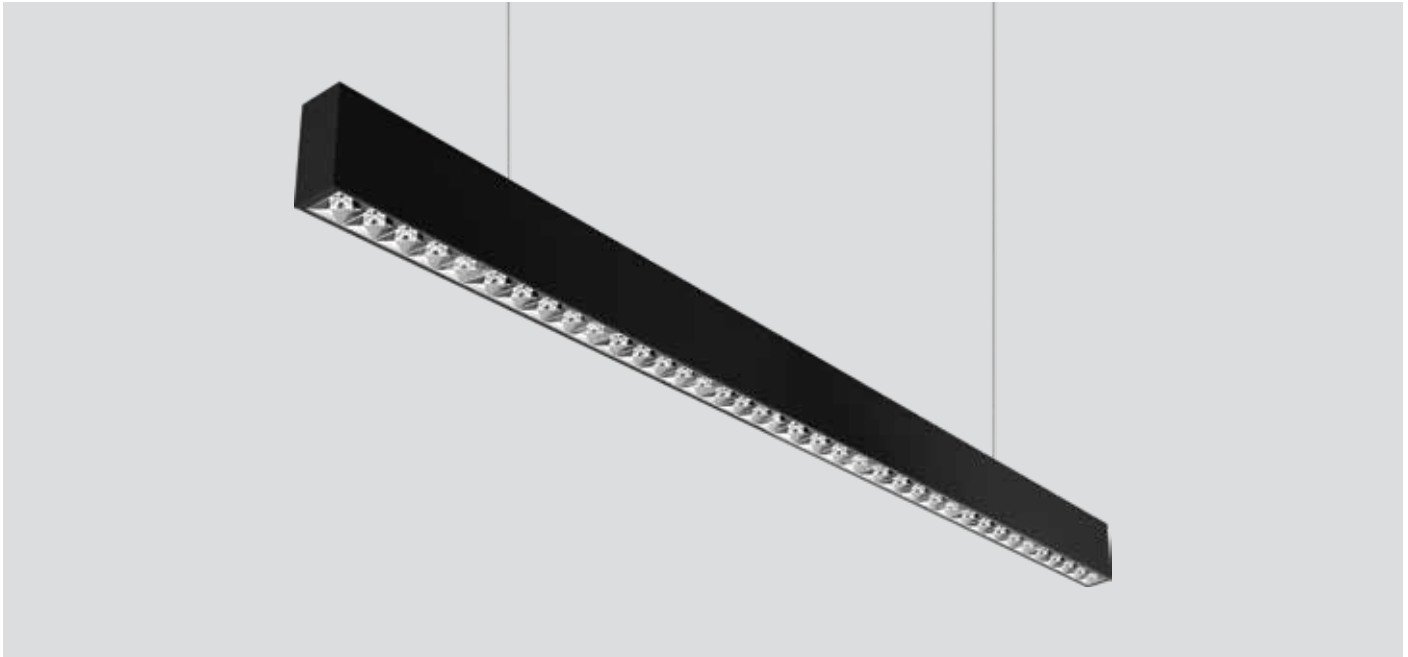

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: Nichia
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 12°, 20°, 34°, 48°, 60°, Wall Wash
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Vacuum Metalized Chrome Finish
UGR	: <12

Physical

Body	: Extruded Aluminium with Die-cast Endcaps
Mounting	: Surface / Pendant
Finish	: Black(RAL9005) White(RAL9016) Grey (RAL 9006)

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%



Ordering Guide

Pendant - Direct

ID	Wattage	Dimension (mm)
3469	Upto 20W	612 x 36 x 75
3520	Upto 40W	1212 x 36 x 75
3521	Upto 80W	2412 x 36 x 75

Pendant - Wall Wash

ID	Wattage	Dimension (mm)
2825	Upto 20W	612 x 36 x 75
2826	Upto 40W	1212 x 36 x 75
2827	Upto 80W	2412 x 36 x 75

Surface

ID	Wattage	Dimension (mm)
3457	Upto 20W	612 x 36 x 75
3524	Upto 40W	1212 x 36 x 75
3525	Upto 80W	2412 x 36 x 75

Surface - Wall Wash

ID	Wattage	Dimension (mm)
2822	Upto 20W	612 x 36 x 75
2823	Upto 40W	1212 x 36 x 75
2824	Upto 80W	2412 x 36 x 75

Pendant - Direct-Indirect

ID	Wattage	Dimension (mm)
3452	Upto 20W & 8W	612 x 36 x 75
3522	Upto 40W & 15W	1212 x 36 x 75
3523	Upto 80W & 30W	2412 x 36 x 75