


K-LITE

NEO

Power : Upto 40W Upto 80W
Length : 1210mm 2402mm



Features

- Bridgelux / Equivalent LEDs
- CRI Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



Options

- CCT : 3000K / 4000K / 5700K or TW 2700K to 5700K
- Driver options



Beam Angle




Accessories




Canopy Kit for Control gear

PENDANT
DIRECT



Dimension in mm

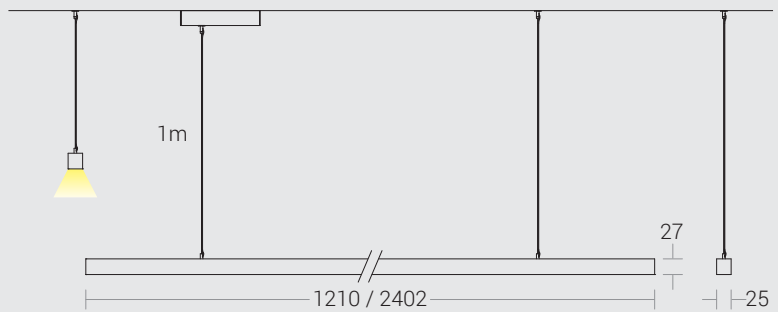


Housing Colour

- ● ● Extruded aluminium with powder coated finish in RAL9005 Black fine texture | RAL9016 White fine texture | RAL9006 Grey fine texture

Light Distribution refer online

Super slim - 25mm

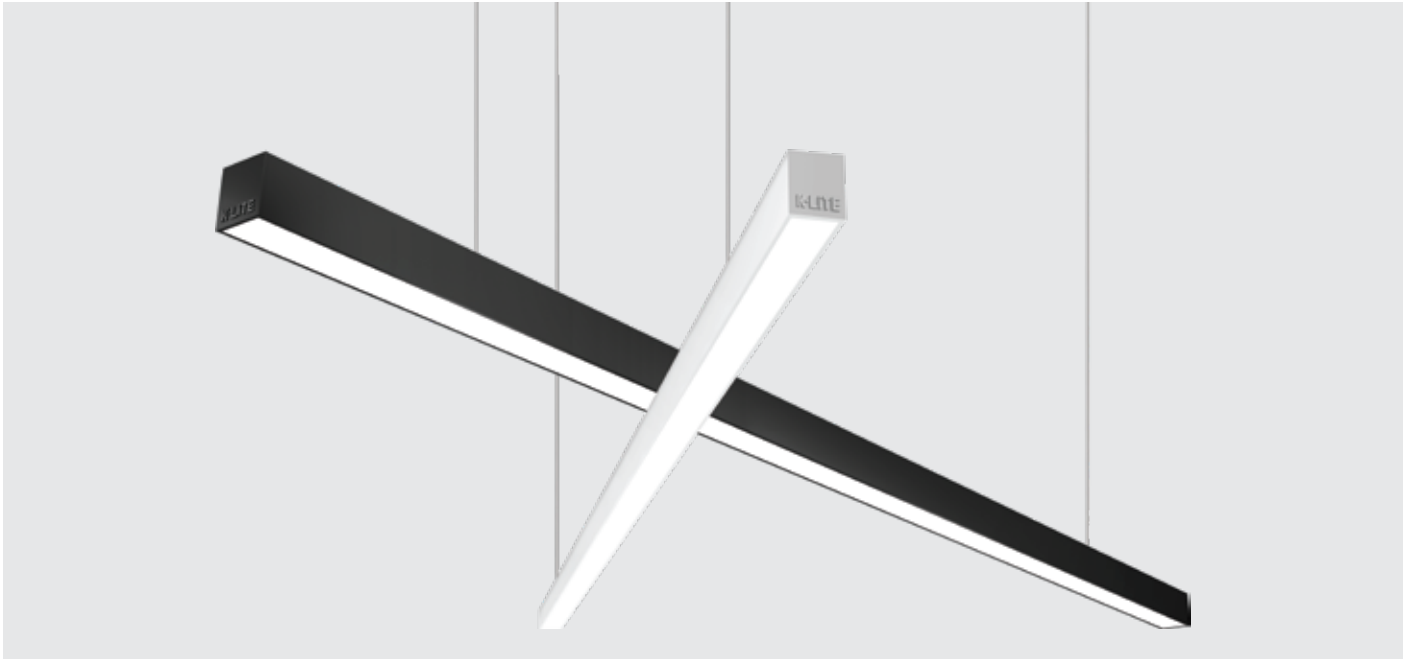

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: Bridgelux / Equivalent
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K

Optical

Tilt	: Fixed
Beam Angle	: 100°
Diffuser Material	: Polycarbonate
Diffuser Finish	: Opal

Physical

Body	: Extruded Aluminium with Die-cast Endcaps
Mounting	: Pendant
Finish	: Black(RAL9005) White(RAL9016) Grey (RAL 9006)

Driver

Power Supply	: Integrated
Power Factor	: >0.90
THD	: <10%
Surge Protection	: Upto 3KV
Efficiency	: >85%



Ordering Guide

Pendant - Direct

ID	Wattage	Dimension (mm)
3497	Upto 40W	1210 x 25 x 27
3498	Upto 80W	2402 x 25 x 27

