

These flower bed luminaire is a combination of low height tube. These luminaries offer glare free illumination and are perfect for illuminating entrances, footpaths as well as garden and landscape architecture.

Product Description

- Extruded aluminium alloy (grade 6063) with die-cast aluminium components and non corrosive SS fasteners.
- Decorative die-cast aluminium rook base with leaf decoration.
- Single moulded spherical translucent PMMA dome for rotationally symmetrical distribution of light.
- Turn type polycarbonate locking system for easy maintenance.
- Mounting plate Die cast aluminium double powder coated with an anchorage unit and stainless steel fixing screws.
- Cable entries for through-wiring of mains supply cable.
- Prewired with E27 holder and suitable for operation on 240V, 50Hz single phase ac supply.



Product Benefits


- The diffuser contributes to the creation of ambiance and to visual comfort by reducing glare.
- Low maintenance cost.
- Distinctive with unlimited durability.
- Decorative design for classical architecture.

Area of Application

Suitable for low / medium public areas.

Available Finish

- Pure polyester powder coated
- RAL 9004 Signal black
- RAL 9007 Grey aluminium
- RAL 7016 Anthracite grey
- Graphite grey

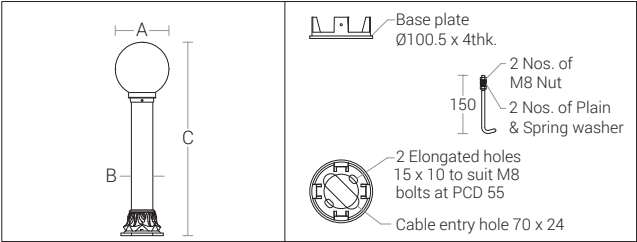

ID	Holder	A	B	C
4543	E27	Ø250	100	900

Max. Wattage : 13W LED / 20W CFLE