K-LiTE Zoom Micro

LED compact spot light luminaires designed to provide directional light. The luminaires comes with a connecting cable and bracket for permanent installation on a wall, under a ceiling or on floor.

Product Description

- Luminaire made of pressure die cast aluminium of high corrosion resistance and non corrosive stainless steel fasteners.
- · Clear tempered glass.
- · Mounting die-cast aluminium bracket arrangement to facilitate easy installation at any desired location.
- Rotary ring to adjust focusing from 15°-60° beam angles (Zoomable).
- · Cable entries for through-wiring of mains supply cable.
- CRI (Ra): >80 (90 CRI On Request).
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- · Available CCT: 3000K (Other CCT's on request)













Product Benefits


- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- · Quick & simple installation.
- · Clear glass in the front with continuous rubber gasket to ensure adequate sealing against ingress of moisture, dust, insects etc.,
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Pathways, Parks, Sculptures, Gardens, Structures and Landscape lighting.

Available Finish

Powder coated RAL 9005 Jet black

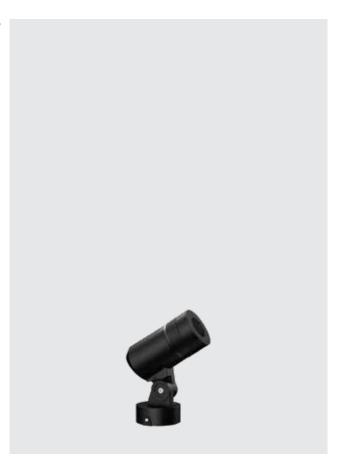

K-LITE Zoom Micro





OPEN SOURCE

Technical Specifications

General Light Source

ID: 2587 Light Source : CREE COB

System Wattage : 6W LED CRI (Ra) :>80 (90 CRI - On Request)

Operating Temperature :-15°C~+50°C LED Colour Temperature :3000K (Other CCT's on request)

Physical Driver

Body Power Supply : Die cast aluminium : Integral Diffuser : Clear Tempered Glass Input Voltage : 230-240Vac : 50-60Hz : Surface Frequency Mounting Finish : Powder Coated Surge Protection 2KV RAL 9005 Jet black Efficiency :>85%

O., ti . . I D . . f


Dimmable Option

Beam Angle : 15° - 60° (Zoomable)

: DALI

Optical Performance





Note: It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in

