

LED compact spot light luminaires designed to provide directional light. The luminaire comes with a connecting cable and bracket for permanent installation on a wall, under a ceiling or on floor.

### Product Description

- Luminaire made of pressure die cast aluminium of high corrosion resistance and non corrosive stainless steel fasteners.
- Clear tempered glass.
- Mounting die-cast aluminium bracket arrangement to facilitate easy installation at any desired location.
- Rotary ring to adjust focusing from 15° - 60° beam angles (Zoomable).
- Cable entries for through-wiring of mains supply cable.
- CRI (Ra) : >80 (90 CRI - On Request).
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Available CCT : 3000K (Other CCT's on request)



### Product Benefits


- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- Quick & simple installation.
- Clear glass in the front with continuous rubber gasket to ensure adequate sealing against ingress of moisture, dust, insects etc.,
- Sustainable LED technology offers durability and optimal light output with low power consumption.

### Area of Application

Architectural and building facade lighting, Pathways, Parks, Sculptures, Gardens, Structures and Landscape lighting.


### Available Finish

Powder Coated RAL 9005 Jet black

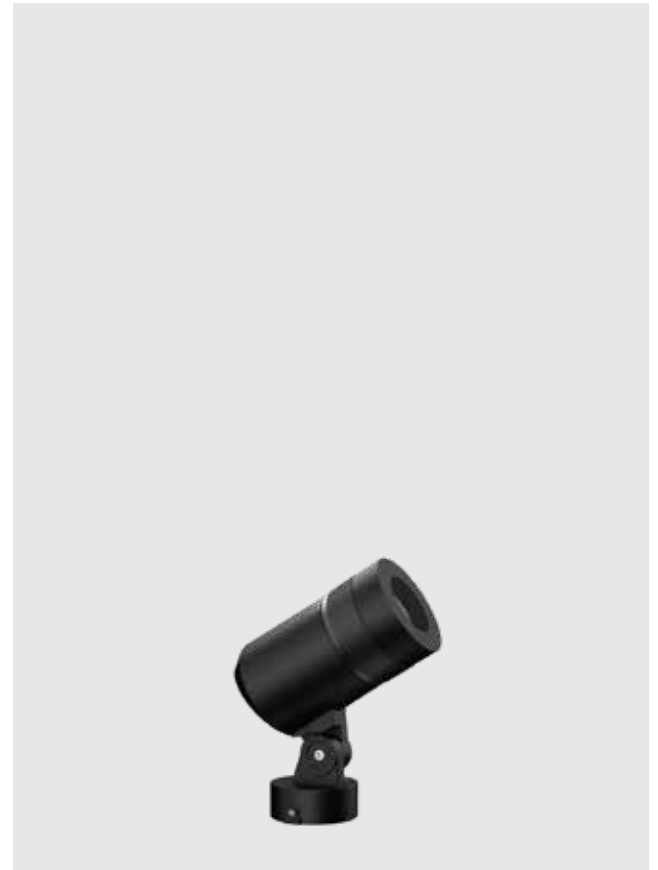



TRIL INFOPARK, CHENNAI

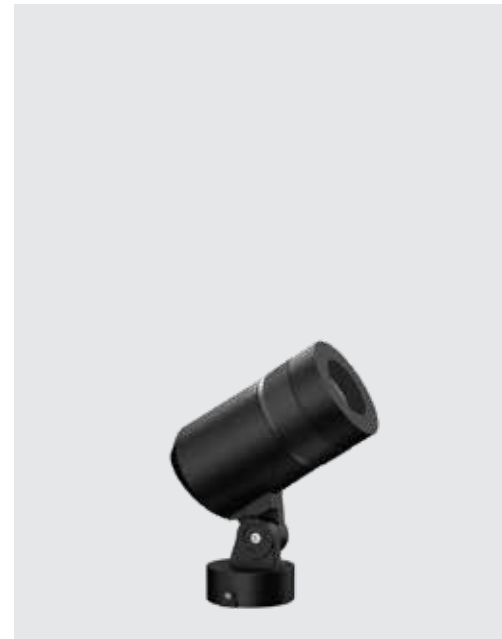

## Technical Specifications

### General

ID	: 2594
System Wattage	: 20W LED
Operating Temperature	: -15°C~+50°C

### Physical

Body	: Die cast aluminium
Diffuser	: Clear Tempered Glass
Mounting	: Surface
Finish	: Powder Coated RAL 9005 Jet black

### Light Source



Light Source	: CREE COB
CRI (Ra)	: >80 (90 CRI - On Request)
LED Colour Temperature	: 3000K (Other CCT's on request)

### Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Surge Protection	: 3KV
Efficiency	: >85%
Dimmable Option	: DALI

### Optical Performance

Beam Angle	: 15° - 60° (Zoomable)
------------	------------------------



**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)