

High efficiency LED flood lights designed to provide directional spot light. The product design and construction of the luminaires are characterized by high luminous efficiency, an extremely long service life and uniform illuminance. Their sturdy construction makes them particularly suitable for areas where a high level of robustness is required.

Product Description

- Luminaire made of pressure die cast aluminium of high corrosion resistance and non corrosive stainless steel fasteners.
- Clear tempered glass.
- Bracket to facilitate proper aiming of the luminaire at desired angle.
- Available in 15° / 25° / 40° beam angles
- Cable entries for through-wiring of mains supply cable.
- CRI (Ra) : >80 (90 CRI - On Request)
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Available CCT : 3000K (Other CCT's On Request)



Product Benefits

- High luminous efficiency at reduced wattage.
- Elegant, Robust design
- Sustainable LED technology offers durability and optimal light output with low power consumption.


Area of Application


Architectural and building facade lighting, Pathways, Parks, Sculptures, Structures and Security lighting.

Available Finish

Pure polyester powder coated

- Black
- Grey

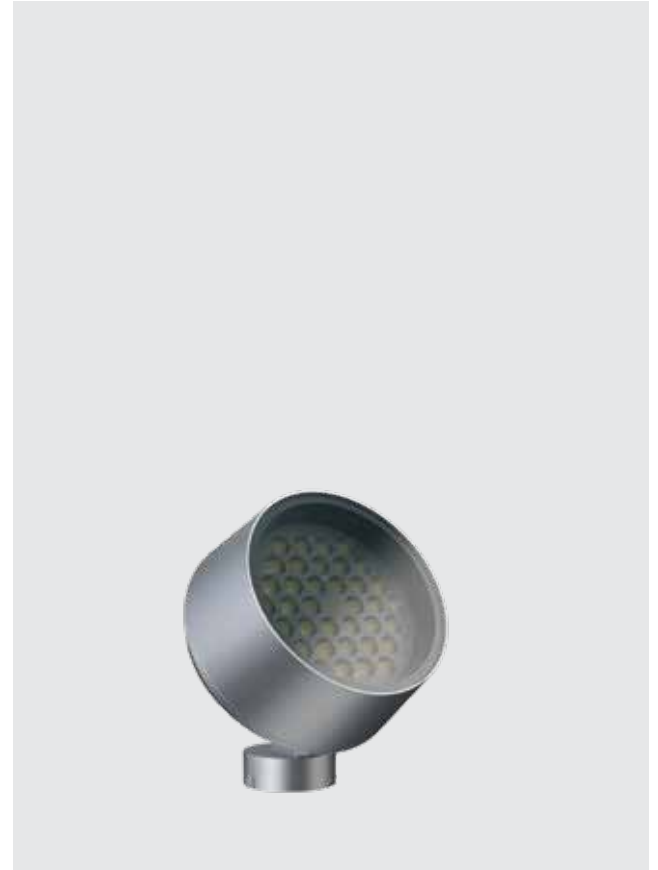

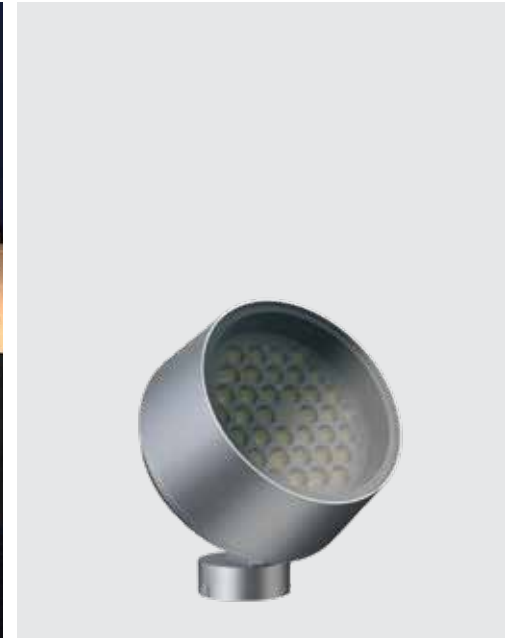

Technical Specifications

General

ID : 2579
 System Wattage : 72W LED
 Operating Temperature : -15°C~+50°

Physical

Body : Die cast aluminium
 Diffuser : Clear Tempered Glass
 Mounting : Surface
 Finish : Powder Coated
 Black / Grey

Light Source

Light Source : OSRAM / CREE
 CRI (Ra) for White light : >80 (90 CRI - On Request)
 LED Colour Temperature : 3000K (Other CCT's On Request)

Driver

Power Supply : Integral
 Input Voltage : 230-240Vac
 Frequency : 50-60Hz
 Surge Protection : 3KV
 Efficiency : >85%
 Dimmable Option : DALI

Optical Performance

Beam Angle : 15° / 25° / 40°
 (Other BA On Request)

