

"Valeo" recessed zoom LED down light, adjustable model spot light luminaire. The die cast aluminium housing is ideal for better thermal management. Elegantly designed fixture under the green lighting, energy efficient category.

### Product Description

- The body of zoom wall washer made of die-cast aluminium which has excellent mechanical strength, aluminium heat sink for better thermal management.
- Adopting reflector which is with excellent optics effect and excellent spot light effect.
- The lamp can be positioned at various angles for the directional light throw in wall washer applications.
- Luminaire integrated with 40W LED.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply.
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : 7217-CCT ( Colour Temperature )
- Available CCT : 3000K, 4000K (5700K,6500K on request).



### Product Benefits

- Excellent efficiency for high energy savings of up to 80% compared to CFL downlights.
- Quick & simple installation.
- Flexible deployment options with a wide spectrum of applications.

### Area of Application

Retail Sector, Corporate Office, Corridors, Residential & Educational premises, Hospitality Industry, Commercial & Business Centers, etc.

### Available Finish

White epoxy polyester powder coating.





## Technical Specifications

### General

ID	: 7217
System Wattage	: 40W LED
COD	: Ø170
Driver Integrated	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

### Physical

Body	: Die-Cast Aluminium
Diffuser	: Clear Polycarbonate
Mounting	: Ceiling Recess / Adjustable
Finish	: White epoxy polyester powder coating

### Light Source


Light Source	: CITIZEN
LED Lumens	: 4659 lm
CRI (Ra)	: >80 (90 On Request)
LED Colour Temperature	: 3000K / 4000K / 5700K/6500K(On Request)

### Driver

Power Supply	: Integrated
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >85%
Dimmable options	: Triac / 1-10V / Dali

### Optical Performance

Colour Temperature	: 3000K / 4000K / 5700K
Luminous flux	: 3290 / 3129 / 3559 lm
Beam Angle	: 40° (Adjustable)

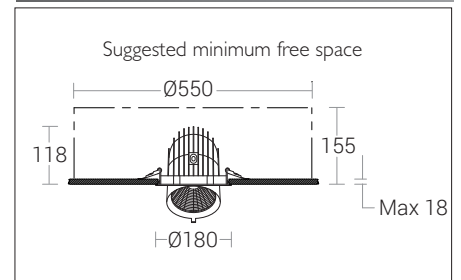

## Light Distribution

