K-LiTE

Lucy 2.0 - Column Light

Elegant column lighting feature, which is suitable for both modern and classic architecture. Ideal for creating orientation with exceptional visual comfort. These luminaries offer general ambient light in open spaces giving a sense of security in night-time. Clean Lines and pure form are the underlying elements in this series of column light, designed to provide rotationally symmetrical illumination, Light emission 360°.

Technical Specifications

- Luminaire made of extruded aluminium alloy (grade 6063) with pressure die-cast aluminium components and non corrosive SS fasteners.
- · Shielded light.
- · Non yellowing UV stabilized clear polycarbonate diffuser.
- · Silicone gasket.
- Die cast aluminium mounting plate with an anchorage unit made out of hot dip galvanised steel for extra guarantee against corrosion. Luminaire can be aligned on the mounting plate around 360°.
- · Cable entries for through-wiring of mains supply cable.
- · Integral constant current power supply
- CRI (Ra): ≥80
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide: KL-27042-CCT (Colour Temperature)
- Available CCT: 2700K, 3000K, 4000K, 5700K



Product Benefits


- · Practical . Elegant . Efficient
- · Timeless modern design options.
- Easy to maintain, robust and durable construction.
- Soft diffused lighting protects pedestrians from glare and provides distinctive lighting with exceptional visual comfort.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Suitable for Private & Public areas, Illuminating Driveways, Pathways, Building surrounds, Entrances, Squares & Gardens, Promenades.

Available Finish

Pure polyester powder coated RAL 9004 Black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

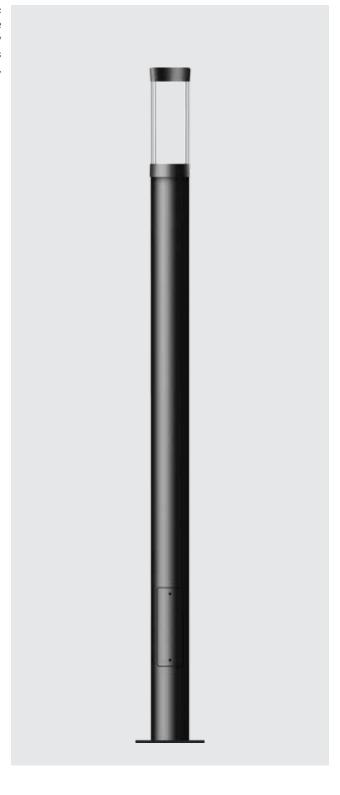





BENGALURU INTERNATIONAL AIRPORT, TERMINAL 2

362

⊣ Ø176 ⊢

Technical Specifications

General

ID : 27042 30W LED System Wattage Driver Integral Constant Current Operating Voltage : 100-277Vac Operating Temperature :-15°C~+50°C

Physical

Body Diffuser Clear Polycarbonate Gasket

Mounting Surface Finish

Driver

CRI (Ra)


Light Source

LED Colour Temperature

Light Source

Power Supply : Integral 50-60 Hz :>0.95 :<10% : 4KV

3 (((() () () () () () () () () () () () () () () () () () () () () () () () () () () () () () () () () () () () () () ()

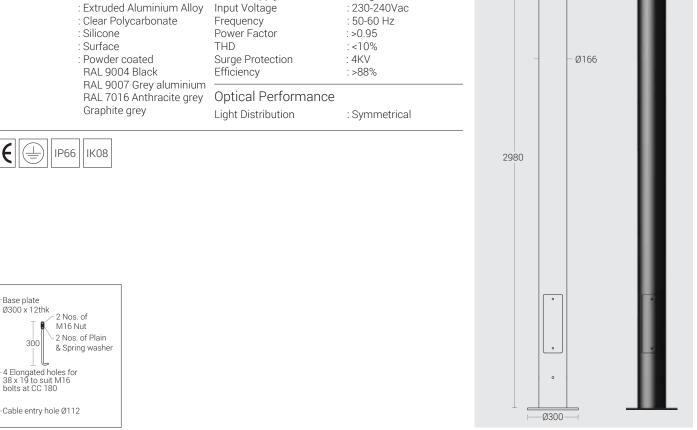

: LUMILEDS

5700K

: 2700K / 3000K / 4000K

:>80