

K-LITE

Deep

Power : Upto 40W Upto 80W
Length : 1210mm 2402mm

Upto
100
lm/w

Features

- Lumiled / Equivalent LED's
- CRI Ra>80 (>90 On Request)
- L80 / B10 @ 50,000 Hrs
- Standard suspension kit 1M (2M available on request)

Options



Beam Angle

BA120°

Diffused


Accessories




350 x 56 x 34
Canopy Kit for Dimmable options

K-LITE


Pendant-direct

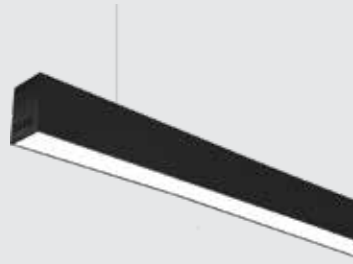

Pendant-direct / Indirect

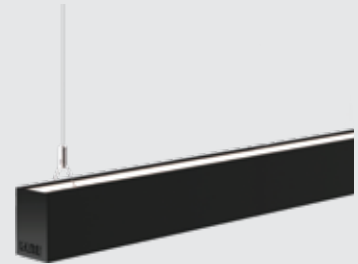

Dimension in mm

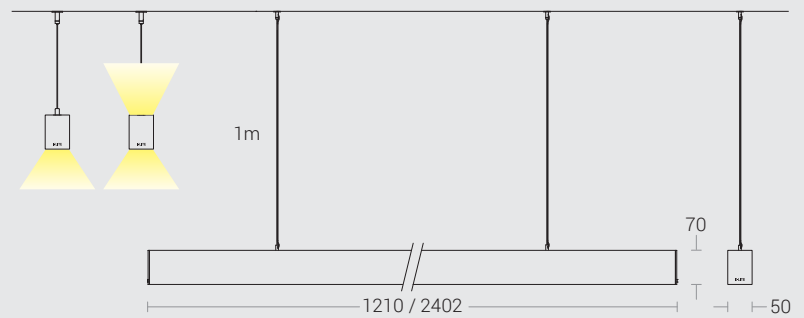


Housing Colour




Extruded aluminium with powder coated finish in
RAL9004 Signal Black fine texture | RAL9016 Traffic White fine texture |
RAL 9007 Grey aluminium fine texture


Light Distribution

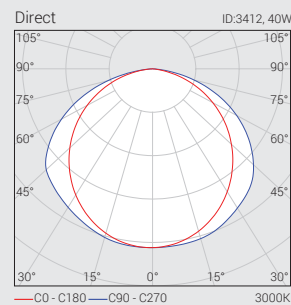

Prismatic



PC Opal Matte

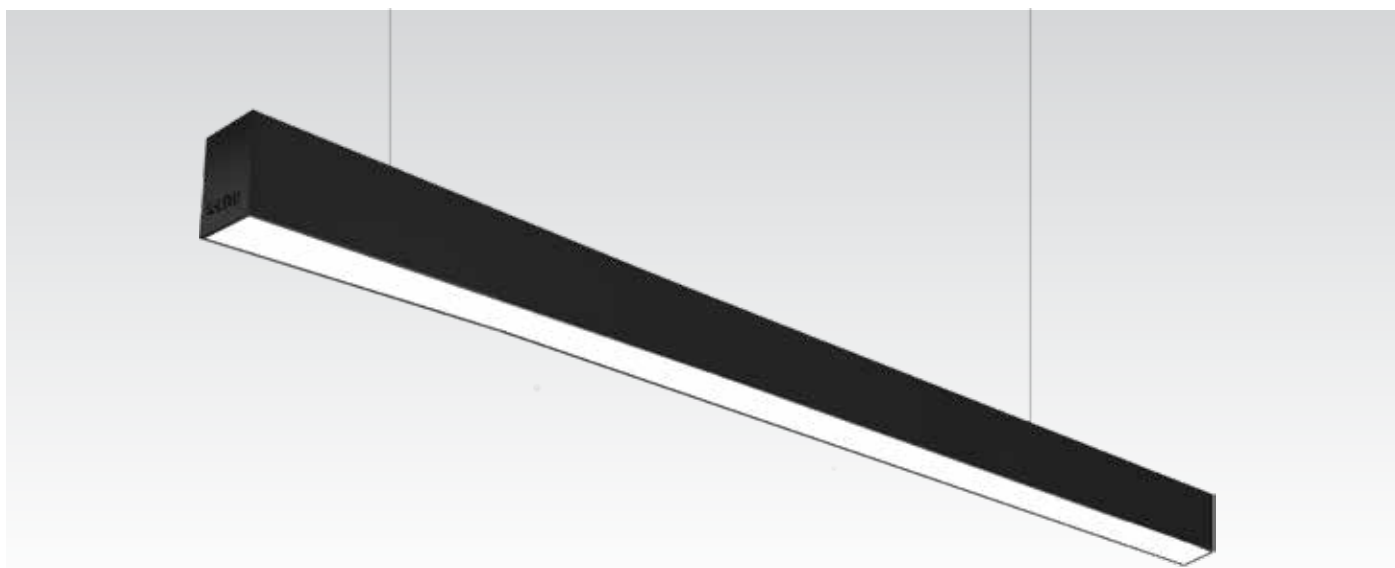

Technical Specifications

General

Driver : Constant Current
 Input Voltage : 198-264Vac
 Operating Temperature : -15°C~+50°C

Light Source

Light Source : Lumiled / Equivalent
 LED Lumens : 4500 lm / 6000 lm
 CRI (Ra) : >80 (>90 On Request)
 LED Colour Temperature : 2700K / 3000K / 4000K
 5700K

Optical

Tilt : Fixed
 Beam Angle : 120°
 Diffuser Material : Polycarbonate
 Diffuser Finish : Opal Matte / Prismatic
 UGR : <19

Physical

Body : Extruded Aluminium
 with Die-cast Endcaps
 Mounting : Pendant
 Finish : RAL 9004 Signal black
 RAL 9016 Traffic White
 RAL 9007 Grey aluminium

Driver

Power Supply : Integral
 Power Factor : >0.90
 THD : <10%
 Surge Protection : 2KV-3KV
 Efficiency : >85%



Ordering Guide

Direct - Opal Matte / Prismatic

ID	Wattage	Dimension (mm)
3412	Upto 40W	1210 x 50 x 70
3412	Upto 80W	2402 x 50 x 70

Direct - Indirect - Opal Matte

ID	Wattage	Dimension (mm)
3412	Upto 40W & 15W	1210 x 50 x 70
3412	Upto 80W & 30W	2402 x 50 x 70

Direct-Prismatic & Indirect-Opal Matte

ID	Wattage	Dimension (mm)
3412	Upto 40W & 15W	1210 x 50 x 70
3412	Upto 80W & 30W	2402 x 50 x 70