

Juno pendant luminaires are a perfect fit for varied lighting applications. The spun aluminium housing is ideal for better thermal management. Elegantly designed fixture under the green lighting, energy efficient category.

Product Description

- Luminaire made of spun aluminium for better thermal management
- Diffuser placed into the provision formed on the periphery of the bottom cover.
- Non yellowing UV stabilized translucent acrylic diffuser.
- Available in 120° beam angle.
- Supplied with adjustable stainless steel suspension kit (1metre).
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : ≥80
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-3022-CCT (Colour Temperature)
- Available CCT : 3000K, 4000K, 5700K



Product Benefits

- High luminous efficiency at reduced wattage.
- Elegant, Functionality
- Dark sky compliant protects pedestrians from glare, in addition to preventing spill light above the horizontal plane.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Corporate Offices, Malls, Restaurants, Receptions, Corridors, Commercial & Business Centers.

Available Finish

Silver / Gold / Black epoxy polyester powder coating.





Technical Specifications

General

ID	: 3022
System Wattage	: 36W LED
Driver Integral	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Spun Aluminium
Diffuser	: Translucent Acrylic
Mounting	: Pendant
Finish	: Powder Coated Silver / Gold / Black

Light Source


Light Source	: NICHIA
LED Lumens	: 5400 lm
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 5700K






Driver

Power Supply	: Integral
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >85%

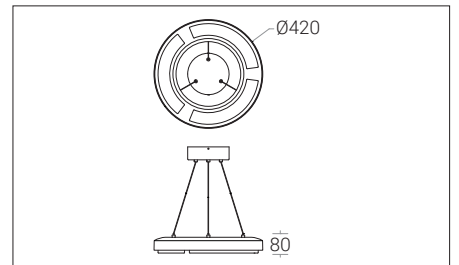
Optical Performance

Colour Temperature	: 3000K
Luminous flux	: 2245 lm
Light Distribution	: 120°







 60,000hrs L70 B10 SDCM≤3  100-277V 50-60Hz

Light Distribution





Technical Specifications

General

ID	: 3009
System Wattage	: 60W LED
Driver Integral	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~50°C

Physical

Body	: Spun Aluminium
Diffuser	: Translucent Acrylic
Mounting	: Pendant
Finish	: Powder Coated Silver / Gold / Black

Light Source



Light Source	: NICHIA
LED Lumens	: 9000 lm
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Power Factor	: >0.97
THD	: <10%
Surge Protection	: 6KV
Efficiency	: 90%

Optical Performance

Colour Temperature	: 3000K
Luminous flux	: 4886 lm
Beam Angle	: 120°

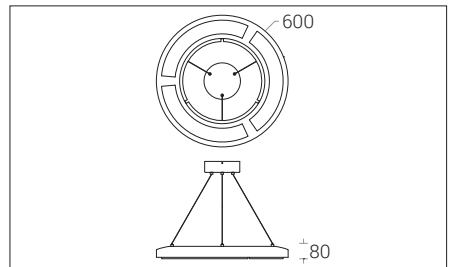

Light Distribution

