



JAIPUR CHAUPATI



Technical Specifications

General

ID	: 4472
System Wattage	: 6W LED
Driver Non-Integral	: Constant Voltage
Operating Voltage	: 24Vdc
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-cast Aluminium
Front Ring	: 316 Grade Stainless Steel
Diffuser	: Clear Toughened Glass T=8mm
Louvre	: Honey Comb
Mounting Sleeve	: ABS - Black
Mounting	: Recess

Light Source



Light Source	: LUMILEDS / OSRAM
CRI (Ra)	: ≥80 (≥90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K

Driver

Power Supply	: Non Integral
--------------	----------------

Optical Performance

Beam Angle	: 15° / 25° / 40°
------------	-------------------

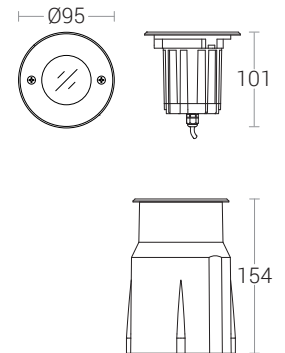

Mounting Sleeve

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in



JAIPUR CHAUPATI

Technical Specifications

General

ID	: 4472
System Wattage	: 6W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-240Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-cast Aluminium
Front Ring	: 316 Grade Stainless Steel
Diffuser	: Clear Toughened Glass T=8mm
Louvre	: Honey Comb
Mounting Sleeve	: ABS - Black
Mounting	: Recess

Light Source



Light Source	: LUMILEDS / OSRAM
CRI (Ra)	: ≥80 (≥90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver

Power Supply	: Integral
Input Voltage	: 240Vac
Frequency	: 50-60 Hz

Optical Performance

Beam Angle	: 15° / 25° / 40°
------------	-------------------

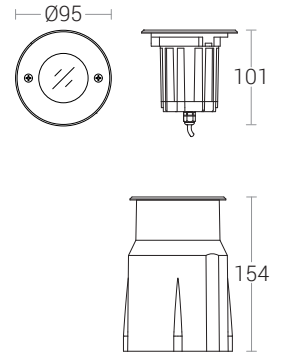

Mounting Sleeve

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in