



Technical Specifications

General

ID	: 4561 / 4562
System Wattage	: 1 x 30W / 2 x 30W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-265Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Rectangular Extruded Aluminium Tube with Die-Cast Aluminium
Diffuser	: Polycarbonate Optical Lens
Mounting	: Floor - Surface
Finish	: Powder coated RAL 9004 Signal black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey
Special Finish	: Bamboo / Teak Texture - On Request

Light Source


Light Source	: NICHIA
CRI (Ra)	: ≥70
LED Colour Temperature	: 3000K / 4000K / 5700K

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.95
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >85%

Optical Performance

Light Distribution	: Type II, Asy
--------------------	----------------

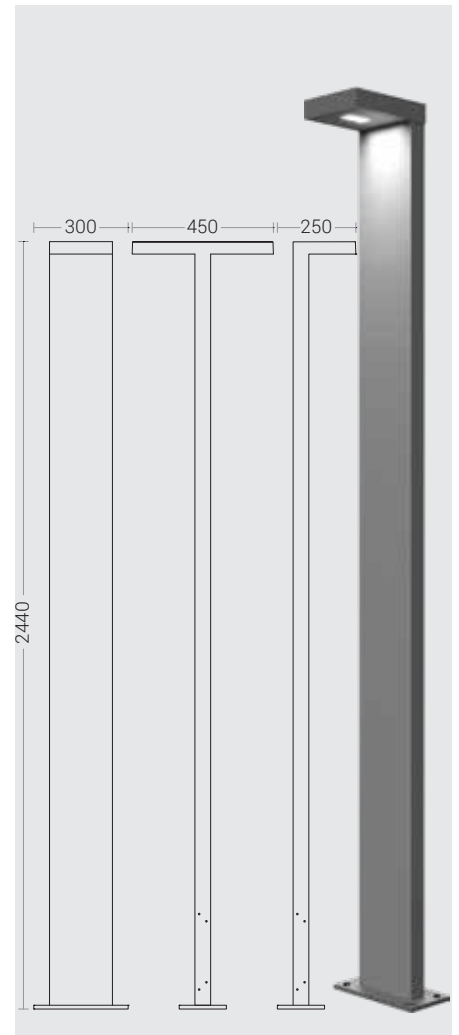

Note : No Loop-in / Loop-out arrangement



Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in