



## Technical Specifications

### General

ID	: 4573
System Wattage	: 1 x 3W LED
Driver Non-Integral	: Constant Voltage
Operating Voltage	: 24Vdc
Operating Temperature	: -15°C~+50°C

### Light Source

Light Source	: LUMILEDS / OSRAM
CRI (Ra)	: >80
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

### Physical



Body	: Extruded aluminium tube
Housing	: Die-Cast aluminium
Diffuser	: Clear toughened glass
Tiltable	: -45° to +45°
Mounting	: Surface
Finish	: Powder coated RAL 9004 Signal black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

### Driver

Power Supply	: Non Integral
--------------	----------------

### Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------

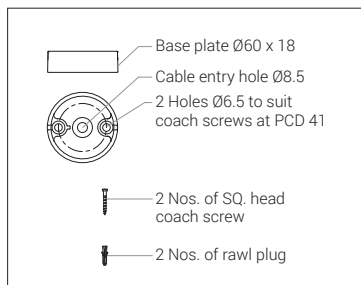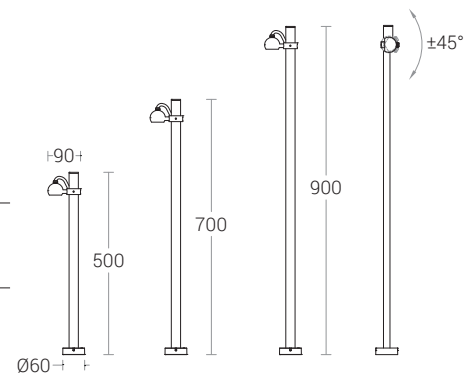

**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)