


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.52V I:0.0399A P:8.8991W PF:0.9664 Freq:50.00Hz Lamp Flux:1152x1 lm		
NAME: SLEEK AJNA BOLLARD	TYPE:BOLLARDS	WEIGHT:
SPEC.:NW, NICHIA	DIM.: Ø100 x 900	SERIAL No.:5117
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-5558	Imax (cd)	80.68	S/MH (C0/180)	11.04
NOMINAL POWER (W)	8	LOR (%)	29.4	S/MH (C90/270)	11.69
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	338.61	η UP, DN (C0-180)	3.1, 11.8
NOMINAL FLUX (lm)	1152	CIE CLASS	SEMI-D.	η UP, DN (C180-360)	2.9, 11.6
LAMPS INSIDE	1	η up (%)	6.0	CIBSE SHR NOM	1.75
TEST VOLTAGE (V)	230	η down (%)	23.4	CIBSE SHR MAX	1.75

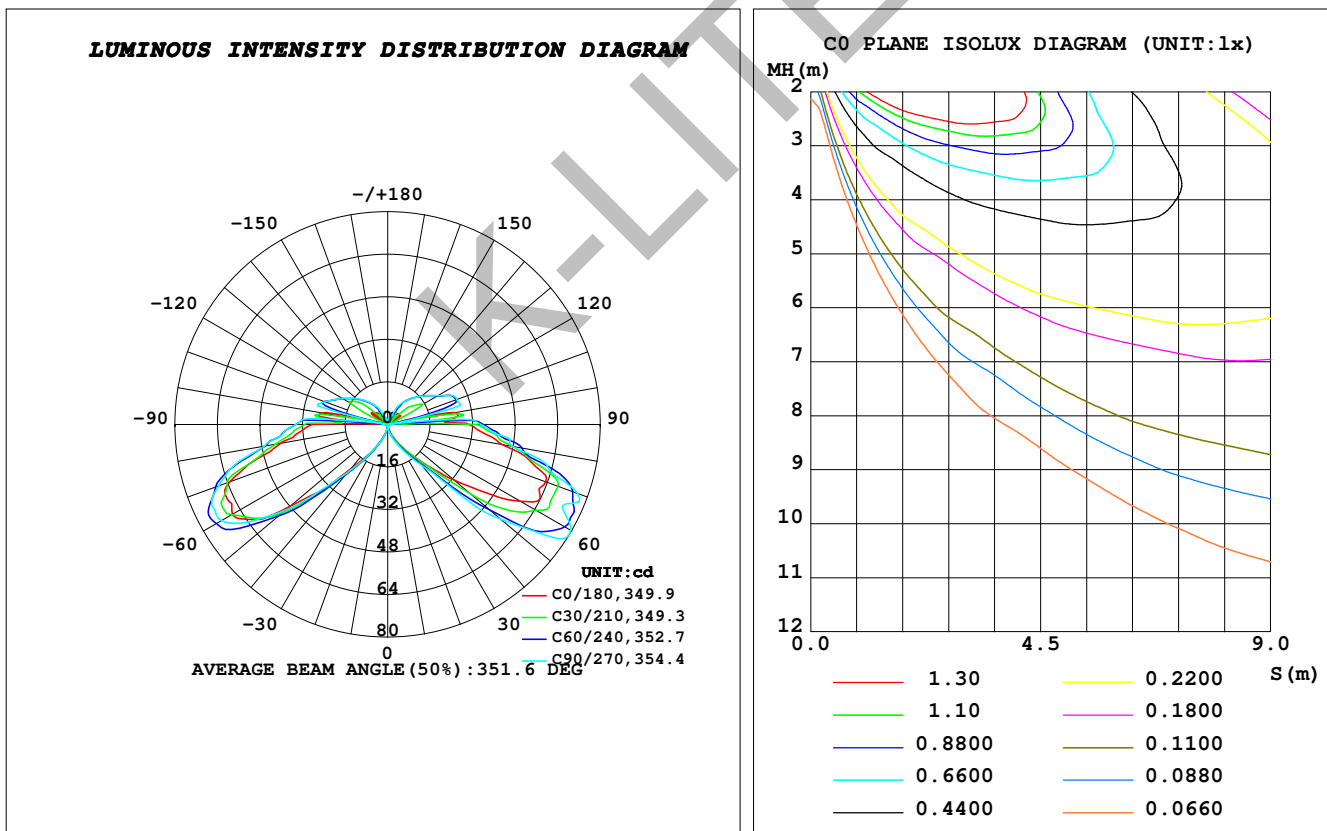

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 18 November 2022

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: