


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.71V I:0.0490A P:5.7870W PF:0.5115 Freq:49.99Hz Lamp Flux:710x1 lm		
NAME: TRIOSCAPE - BRACKET	TYPE:FLOOD LIGHTS	WEIGHT:
SPEC.:NW, LUMILED, BA-15°	DIM.: 83 x 116 x 110	SERIAL No.:4937
MFR.: K-LITE	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-7057	Imax (cd)	5621	S/MH (C0/180)	0.23
NOMINAL POWER (W)	6	LOR (%)	71.5	S/MH (C90/270)	0.21
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	507.61	η UP, DN (C0-180)	0.0, 36.7
NOMINAL FLUX (lm)	710	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 34.8
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	0.00
TEST VOLTAGE (V)	230	η down (%)	71.5	CIBSE SHR MAX	1.00

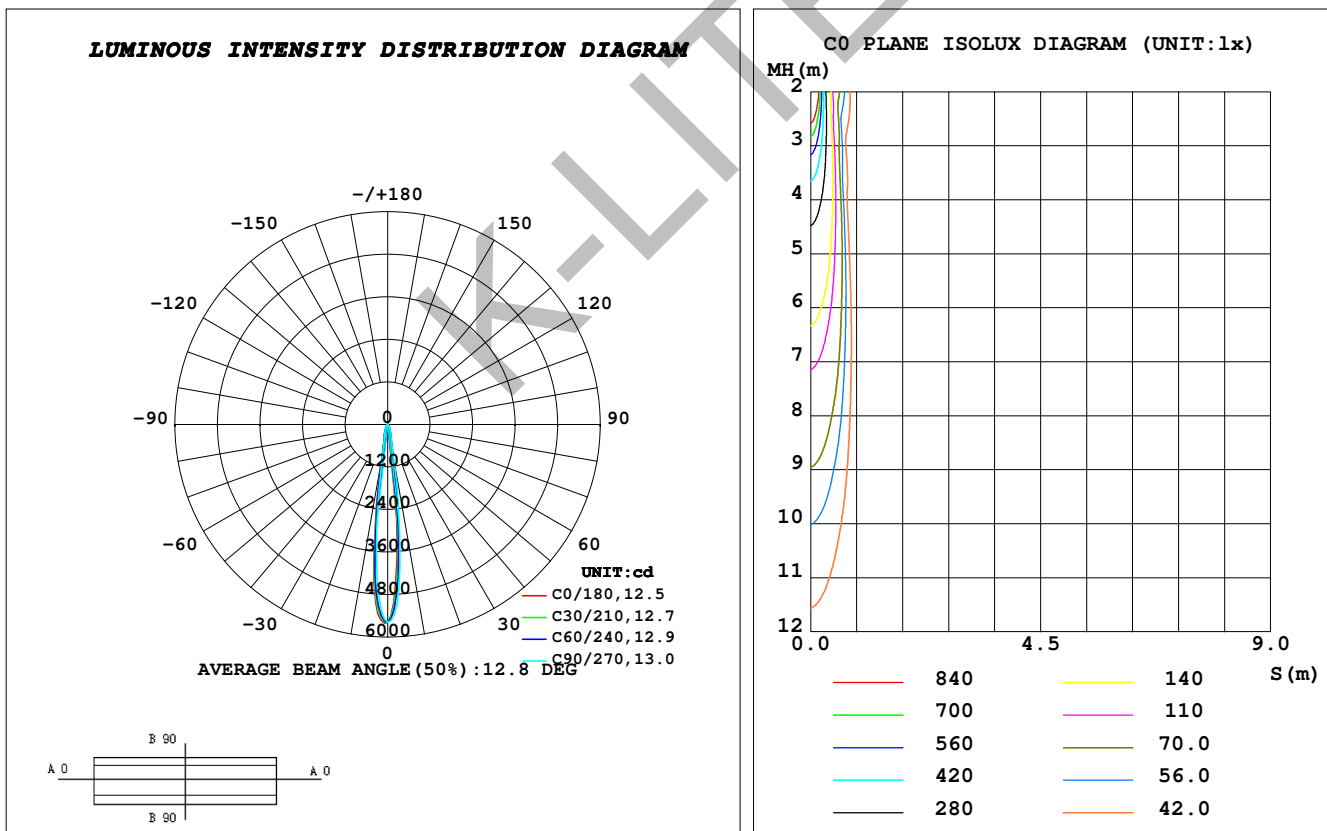

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature: 25.3DEG
Operators: K-LITE
Test Date: 12 September 2022

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System: EVERFINE GO-R5000_V2 SYSTEM V2.00.417
Humidity: 65.0%
Test Distance: 1.852m [K=1.0000]
Remarks: