

Facade luminaires with Hybrid optics, downwards for ambient lighting and orientation, upwards to accentuate architectural elements, Precise lighting for where it is required. Aesthetically shaped wall mounted luminaire with fully shielded light source for striking light effects.

Product Description

- Luminaire made of pressure die cast aluminium, extruded aluminium & external non corrosive stainless steel fasteners.
- Clear toughened glass.
- Polycarbonate optical lens.
- Silicone gasket.
- Die cast aluminium base for easy installation onto the wall / column.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : 90
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-27897-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 6500K



Product Benefits

- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- Quick & simple installation with low maintenance.
- Clear glass in the front with continuous silicone gasket to ensure adequate sealing.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Residential, Building facade, Commercial centres, Passages, Pathways, Sculptures and Structures.


Available Finish

Pure polyester powder coated
RAL 9004 Black
RAL 9007 Grey aluminium
RAL 7016 Anthracite grey
Graphite grey





PARK HYATT, CHENNAI



Technical Specifications

General

ID	: 27897 / 27898
System Wattage	: 1 x 6W / 2 x 6W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-300Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded & die-cast aluminium
Diffuser	: Clear toughened glass
Mounting	: Surface - Wall
Finish	: Powder coated RAL 9004 Black
	RAL 9007 Grey aluminium
	RAL 7016 Anthracite grey
	Graphite grey

Light Source


Light Source	: CITIZEN
CRI (Ra)	: 90
LED Colour Temperature	: 2700K / 3000K/ 4000K 6500K

Driver



Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: ≥ 0.95
THD	: $<15\%$
Surge Protection	: 4KV
Efficiency	: $>80\%$

Optical Performance

Beam Angle	: 15° / 25° / 40°
------------	-------------------



Cone Diagram

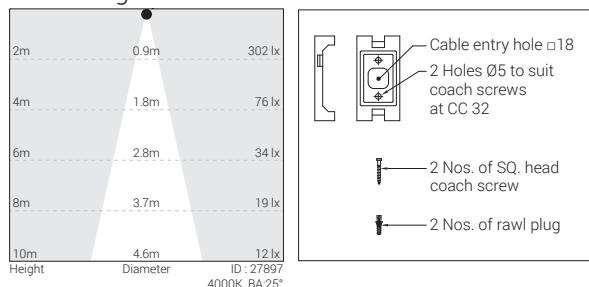

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in